

CAPTURE™

PROTECTION WITHOUT COMPROMISE

Cappture™ safety glasses feature anti-fog lenses and a dielectric safety design, providing superior protection, comfort, and clarity in high-humidity environments and demanding settings. The temples are thoughtfully positioned above the frame, ensuring a secure and comfortable fit, while preventing interference with prescription lenses. Ideal for challenging work environments, these glasses are built to offer lasting performance and reliability.



DIELECTRIC




H2X
OPTIONS



H2MAX
OPTIONS



OVER THE
GLASSES

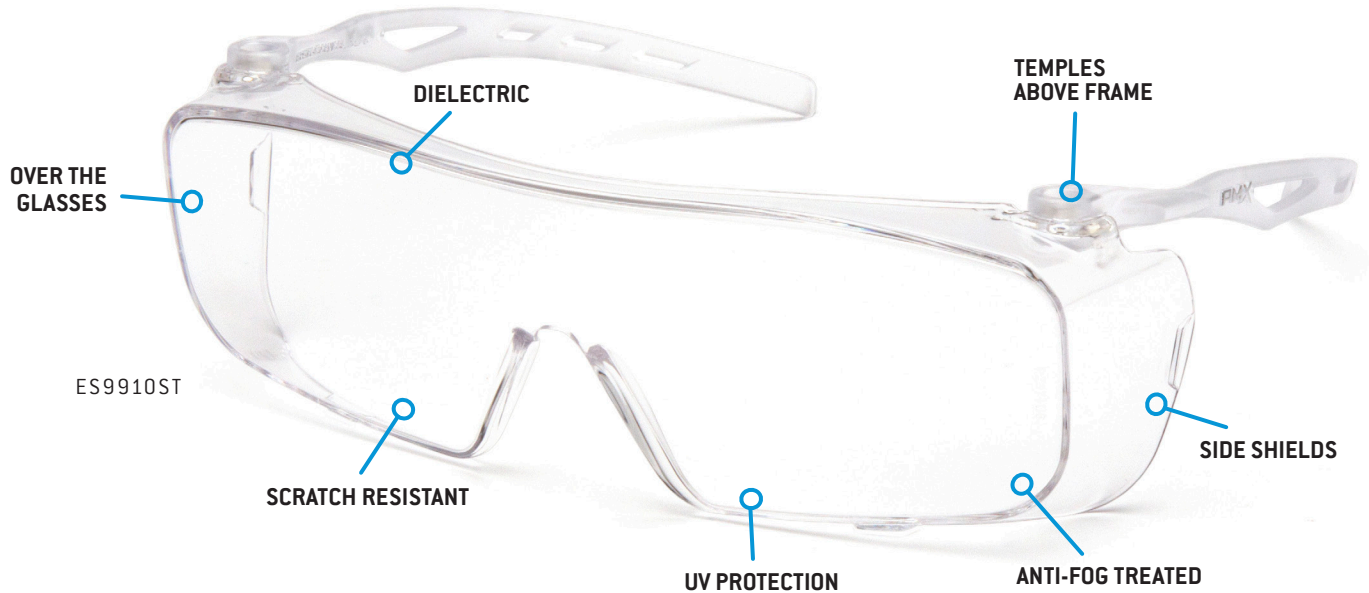

FEATURES

Convenient Coverage: Designed to comfortably fit over prescription glasses for comprehensive protection

Durable Lens: Polycarbonate lenses provide 99% UV protection, lightweight comfort, and scratch-resistant coating for clear vision

Optimized Fit: Temples are positioned above the frame, running from the brow bar to prevent interference with prescription lenses, offering a comfortable fit and smooth integration

Comprehensive Coverage: Integrated side shields ensure complete eye protection from multi-directional hazards, enhancing safety in dynamic work environments

Shock-Proof Vision: Constructed with non-conductive materials, offering steadfast protection against electrical hazards while ensuring seamless visibility in any workplace

Anti-Fog Clarity: The lens is treated with anti-fog properties to guarantee fog-free clarity, even in extreme conditions

Built Tough: CE & UKCA certified to EN 166 for eye and face protection devices

CAPPTURE™

PROTECTION WITHOUT COMPROMISE

Cappture™ safety glasses feature anti-fog lenses and a dielectric safety design, providing superior protection, comfort, and clarity in high-humidity environments and demanding settings. The temples are thoughtfully positioned above the frame, ensuring a secure and comfortable fit, while preventing interference with prescription lenses. Ideal for challenging work environments, these glasses are built to offer lasting performance and reliability.



DIELECTRIC



H2X
OPTIONS



H2MAX
OPTIONS



OVER THE
GLASSES

VARIATION



Lens and Temples



ES9910ST

Clear **H2X**

MATERIALS

Lens	Temples	Nose Piece	Hinge
Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate

MARKINGS

Part No.	Lens Marking	Temple Marking	Lens Marking Symbols	Temple Marking Symbols	Measurements
ES9910ST	2C-1.2 P 1FT N CE	CE P EN166 FT	Code - field of use 2 or 3: UV filter 5 or 6: Solar filter Colour Perception C: Unimpaired colour perception Protection Class 1.2 - 6: Degree of visible light filtration Optical Class 1: High optical quality - no optical distortion Mechanical Strength F: Low energy impact, resists a 6 mm, .86 g at 45 m/s T: Impact protection at extreme temperature conditions Symbols P: Manufacturer's mark N: Filter with anti-fog CE: Europe standard	Symbols CE: Europe standard P: Manufacturer's mark EN166: CE specification for protective eyewear Mechanical Strength F: Low energy impact T: Impact protection at extreme temperature conditions	Weight: 29.5 gm Bridge: 23.1 mm Lens base: 2.5 curve Lens size diagonal: 145.7 mm Lens size vertical: 51.5 mm Lens thickness: 1.8 mm Overall length: 160 mm Overall width: 132.5 mm

Product markings may vary // Updated as of 10.26