

CAPPTURE™ PRO

PROTECTION WITHOUT COMPROMISE

Cappture™ Pro dielectric goggles provide superior protection with a secure seal, scratch-resistant lenses, H2MAX anti-fog coating, and a comfortable fit for all-day wear in hazardous environments.



DIELECTRIC



PASSES
DROPLET AND
SPLASH TEST



PASSES
DUST TEST



PASSES
FINE DUST
TEST




H2MAX



OVER THE
SPEC



INCLUDES
STRAP

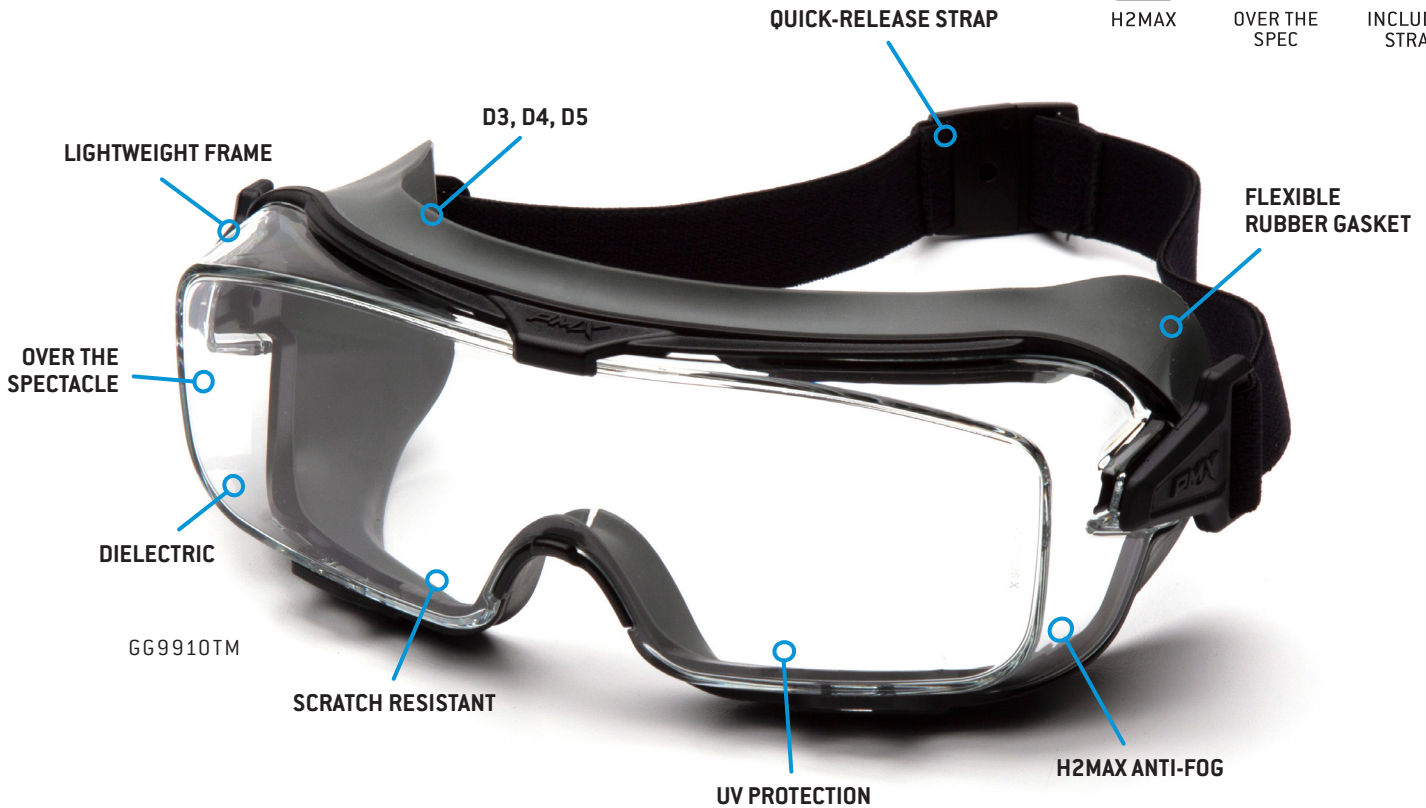

FEATURES

Superior Protection: Shields eyes from flying debris, liquid splashes, mists, vapors, and fumes with a secure seal


Durable Lens: Polycarbonate lenses provide 99% UV protection, lightweight comfort, and scratch-resistant coating for clear vision

Comfort Seal: Lightweight frame, flexible rubber gasket, and quick-release strap ensure a secure, comfortable fit and easy adjustments for all-day protection

Shock-Proof Vision: Constructed with non-conductive materials, offering steadfast protection against electrical hazards while ensuring seamless visibility in any workplace

Maximum Anti-Fog Clarity: The lens, treated with H2MAX, provides maximum clarity in extreme conditions while adding abrasion and chemical resistance, ensuring durable, waterproof vision even after repeated cleaning

Splash Safe & Dust Defend: Passes D3: Droplet and Splash Test, D4: Dust Test, and D5: Fine Dust Test for added safety and protection

Built Tough: Meets ANSI/ISEA Z87.1-2020 +,  certified for CAN/CSA Z94.3-20 for eye and face protection devices



GG9920TM



If spectacles infringe on the seal, the D5 rating is no longer valid.

CAPPTURE™ PRO

PROTECTION WITHOUT COMPROMISE

Cappture™ Pro dielectric goggles provide superior protection with a secure seal, scratch-resistant lenses, H2MAX anti-fog coating, and a comfortable fit for all-day wear in hazardous environments.



DIELECTRIC



DROPLET AND SPLASH TEST



DUST TEST



FINE DUST TEST



H2MAX



OVER THE SPEC



INCLUDES STRAP

VARIATIONS



Rubber Gasket with Strap

● GG9910TM Clear **H2MAX**

Rubber Gasket with Strap

● GG9920TM Gray **H2MAX**

MATERIALS

Lens	Rubber Gasket	Strap Holder	Nose Piece	Headband
Polycarbonate	Polycarbonate + Thermoplastic Rubbers (TPR)	Nylon	Polycarbonate	Polyester + Polyoxymethylene

MARKINGS

Part No.	Lens Marking	Temple Marking	Lens Marking Symbols	Temple Marking Symbols	Measurements
GG9910TM	P Z87 + U6 X	P Z87 + D3 D4 / P c SEI Z94.3	P: Manufacturer's mark	P: Manufacturer's Mark	Weight: 66.2 gm
GG9920TM	P Z87 + U6 L2.5 X	P Z87 + D3 D4 / P c SEI Z94.3	Z87: ANSI standard for eye and face protection devices +: High impact X: Tested Anti-fog UV Filter Transmittance U6: .01% max effective far UV • .1% max near UV Visible Light Filters L2.5: 29% max visible light	Z87: ANSI/ISEA Z87.1-2020 Standard for Eye and Face Protection Devices +: High Impact D3: Droplet & Splash Test D4: Dust Test SEI Z94.3: Certified for CAN/CSA Z94.3-20 Standard for Eye and Face Protection Devices	PD: 64 mm Bridge: 31 mm Lens base: 2.5 curve Lens size diagonal: 144 mm Lens size vertical: 52.2 mm Lens thickness: 2.0 mm Overall length: 92 mm Overall width: 178 mm

Product markings may vary // Updated as of 03.25