





# POLYURETHANE DIPPED



# GL402C5

HPPE | Polyurethane

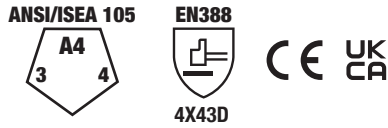

ANSI/ISEA 105 – CUT A4 | ABRASION 3 | PUNCTURE 4  
 EN388 – ABRASION 4 | CUT X | TEAR 4 | PUNCTURE 3 | CUT TDM-100 D

Polyurethane coating on the palm and fingers for good grip and precision handling // 13 gauge HPPE cut-resistant liner delivers cool comfort for all-day wear // Glove design offers excellent touch sensitivity and low particulate shed // Knit cuff creates a snug fit to keep out debris // Hangtag option for retail display

## Suggested Applications

Electronics // General Duty/Purpose // Glass Cutting // Parts Assembly // Sheet Metal Handling // Small Parts Handling

## Glove Breakdown

Type: Dipped Glove
Material: Polyurethane
Outer Liner: 13 Gauge HPPE
Cuff: HPPE + Latex Elastic

**⚠ WARNING: Cancer and Reproductive Harm –P65Warnings.ca.gov**  
 This product contains components that may be a potential risk to allergic reactions (latex in the wrist cuff). Do not use in the event of hypersensitivity signs or a known allergy to latex.

## Packaging

	Inner Polybag	Outer Polybag	Case
GL402C5	1	12 Pair	120 Pair
GL402CHT	-	12 Pair on Hangtags	120 Pair
Made in China			

Product markings may vary // Updated as of 05.23



## Glove Sizing

X-Small	Small	Medium	Large	X-Large	2X-Large	3X-Large
6	7	8	9	10	11	12

All sizes comply with EN ISO 21420 for comfort, fit and dexterity. Only wear the correct size for your hand. Gloves that are too loose or too tight will restrict movement and will not provide the optimal level of protection.

