




LATEX DIPPED



GL503

Polyester | Latex | Crinkle

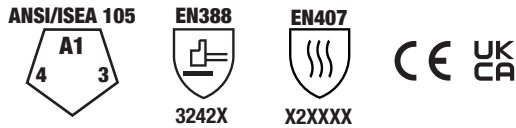

ANSI/ISEA 105 – CUT A1 | ABRASION 4 | PUNCTURE 3
 EN388 – ABRASION 3 | CUT 2 | TEAR 4 | PUNCTURE 2 | CUT TDM-100 X
 EN407 – CONTACT HEAT

Durable crinkle latex coating on the palm and fingers offers superior contact on dry or wet surfaces by channeling liquids away // 10 gauge polyester liner offers a balance between comfort, durability, and moisture resistance // Contact heat protection up to 482°F/250°C // Hangtag option for retail display // Packaging option for vending machines available

Suggested Applications

Assembly // Bottling and Canning // Manufacturing
 // Recycling and Sanitation

Glove Breakdown

Type: Dipped Glove
Material: Crinkle Latex
Outer Liner: 10 Gauge Polyester
Cuff: Polyester + Latex Elastic

⚠ WARNING: Cancer and Reproductive Harm –P65Warnings.ca.gov
 This product contains components that may be a potential risk to allergic reactions (latex in the wrist cuff). Do not use in the event of hypersensitivity signs or a known allergy to latex.

Packaging

	Inner Polybag	Outer Polybag	Case
GL503	–	12 Pair	120 Pair
GL503HT	–	12 Pair on Hangtags	120 Pair
GL503VP	1 Pair Rolled	12 Pair	120 Pair
Made in China			

Product markings may vary // Updated as of 04.23



Glove Sizing

GL503 S – 2XL | GL503HT S – 2XL | GL503VP S – XL

Small	Medium	Large	X-Large	2X-Large
7	8	9	10	11

All sizes comply with EN ISO 21420 for comfort, fit and dexterity. Only wear the correct size for your hand. Gloves that are too loose or too tight will restrict movement and will not provide the optimal level of protection.

