




NITRILE DIPPED



GL602C3

HPPE | Nitrile | Micro-Foam

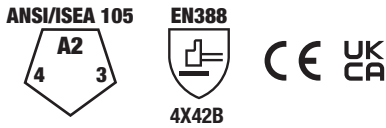

ANSI/ISEA 105 – CUT A2 | ABRASION 4 | PUNCTURE 3
 EN388 – ABRASION 4 | CUT X | TEAR 4 | PUNCTURE 2 | CUT TDM-100 B

Micro-foam nitrile coating on palm and fingers offers an excellent grip on dry or wet surfaces by channeling liquids away // 13 gauge HPPE cut-resistant liner delivers cool comfort for all-day wear // Knit cuff creates a snug fit to keep out debris // Packaging option for vending machines available

Suggested Applications

Automotive // Construction // Delivery // General Duty // Handling Oily Parts // Parts Assembly

Glove Breakdown

Type: Dipped Glove
Material: Micro-Foam Nitrile
Outer Liner: 13 Gauge HPPE
Cuff: HPPE + Latex Elastic

⚠ WARNING: Cancer and Reproductive Harm –P65Warnings.ca.gov
 This product contains components that may be a potential risk to allergic reactions (latex in the wrist cuff). Do not use in the event of hypersensitivity signs or a known allergy to latex.

Packaging

	Inner Polybag	Outer Polybag	Case
GL602C3	1 Pair	12 Pair	120 Pair
GL602C3VP	1 Pair Rolled	12 Pair	120 Pair
Made in China			

Product markings may vary // Updated as of 04.23



Glove Sizing

GL602C3 S – 2XL | GL602C3VP XS – 2XL

X-Small 6	Small 7	Medium 8	Large 9	X-Large 10	2X-Large 11
--------------	------------	-------------	------------	---------------	----------------

All sizes comply with EN ISO 21420 for comfort, fit and dexterity. Only wear the correct size for your hand. Gloves that are too loose or too tight will restrict movement and will not provide the optimal level of protection.