




# NITRILE DIPPED



# GL608C

HPPE | Nitrile | Sandy

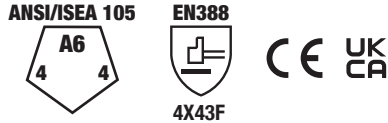

ANSI/ISEA 105-2016 – CUT A6 | ABRASION 4 | PUNCTURE 4  
EN388 – ABRASION 4 | CUT X | TEAR 4 | PUNCTURE 3 | CUT TDM-100 F

Sandy nitrile coating on the palm and fingers provides an effective grip in dry and oily situations // 13 gauge **PMXTECK** HPPE cut-resistant liner delivers cool comfort for all-day wear // High-visibility liner for easy recognition // Knit cuff creates a snug fit to keep out debris

## Suggested Applications

Automotive // General Maintenance // Material Handling // Metal Fabrication

## Glove Breakdown

Type: Dipped Glove
Material: Sandy Nitrile
Outer Liner: 13 Gauge <b>PMXTECK</b> HPPE
Cuff: HPPE + Latex Elastic

⚠ WARNING: Cancer and Reproductive Harm – P65Warnings.ca.gov  
This product contains components that may be a potential risk to allergic reactions (latex in the wrist cuff). Do not use in the event of hypersensitivity signs or a known allergy to latex.

## Packaging

	Outer Polybag	Case
GL608C	12 Pair	120 Pair
Made in China		

Product markings may vary // Updated as of 02.24



REDEFINING COMFORT IN HAND PROTECTION  
**PMXTECK™**

**EXPERIENCE A NEW LEVEL OF PROTECTION AND COMFORT WITH PMXTECK.**  
Our unique plated knit technology for gloves creates an exterior built for durability and an interior so soft and smooth you'll forget you're wearing them.  
With PMXTECK, comfort and safety go hand in hand.

## Glove Sizing

Small 7	Medium 8	Large 9	X-Large 10	2X-Large 11
------------	-------------	------------	---------------	----------------

All sizes comply with EN ISO 21420 for comfort, fit and dexterity. Only wear the correct size for your hand. Gloves that are too loose or too tight will restrict movement and will not provide the optimal level of protection.