




NITRILE DIPPED



GL616C

Para-Aramid + Steel | Nitrile | Micro-Foam

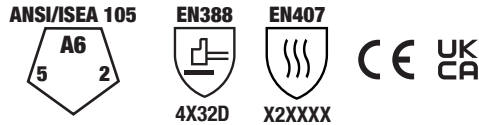

ANSI/ISEA 105 – CUT A6 | ABRASION 5 | PUNCTURE 2
 EN388 – ABRASION 4 | CUT X | TEAR 3 | PUNCTURE 2 | CUT TDM-100 D
 EN407 – CONTACT HEAT 2

Micro-foam nitrile coating on palm and fingers offers an excellent grip on dry or wet surfaces by channeling liquids away // 15 gauge para-aramid liner delivers cut resistance and heat resistance // Contact heat protection up to 482°F/250°C // Knit cuff creates a snug fit to keep out debris

Suggested Applications

General Maintenance // Glass Handling //
 Manufacturing // Metal Fabrication // Steel
 Handling // Woodworking

Glove Breakdown

Type: Dipped Glove
Material: Micro-Foam Nitrile
Outer Liner: 15 Gauge Para-Aramid + Steel
Cuff: Para-Aramid + Steel + Latex Elastic

⚠ WARNING: Cancer and Reproductive Harm – P65Warnings.ca.gov

This product contains components that may be a potential risk to allergic reactions (latex in the wrist cuff). Do not use in the event of hypersensitivity signs or a known allergy to latex.



Packaging

	Outer Polybag	Case
GL616C	12 Pair	120 Pair
Made in Pakistan		

Product markings may vary // Updated as of 01.24

Glove Sizing

Small 7	Medium 8	Large 9	X-Large 10	2X-Large 11
------------	-------------	------------	---------------	----------------

All sizes comply with EN ISO 21420 for comfort, fit and dexterity. Only wear the correct size for your hand. Gloves that are too loose or too tight will restrict movement and will not provide the optimal level of protection.