

RIDGELINE® T2 FULL BRIM

6-POINT RATCHET REPLACEMENT SUSPENSION


UNRIVALED STYLE, ELEVATED PERFORMANCE



COMFORTABLE
PADDING



RATCHETING
SUSPENSION

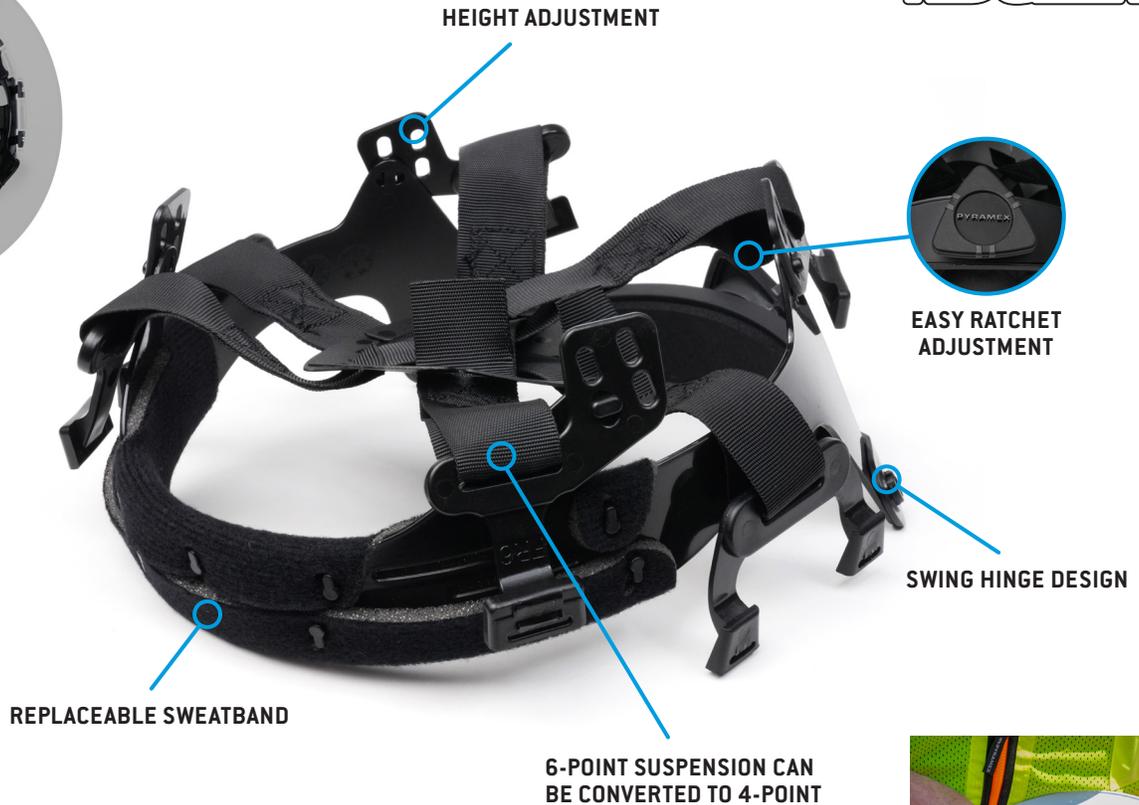

HEIGHT ADJUSTMENT



EASY RATCHET
ADJUSTMENT

SWING HINGE DESIGN

REPLACEABLE SWEATBAND

6-POINT SUSPENSION CAN
BE CONVERTED TO 4-POINT

HPT2R561

MATERIALS

Suspension: HDPE (Polypropylene) + High Impact Nylon

Sweat Band: Polyester Blend

Crown Pad: LDPE (Low Density Polyethylene)

Back Cushion: EVA (Ethylene Vinyl Acetate)

⚠ WARNING: Cancer and Reproductive Harm – P65Warnings.ca.gov

GENERAL SPECIFICATIONS

Weight: 99.22 g

Dimensions: 21.59 x 18.42 x 7.62 cm

Suspension Adjust Sizing: 6.5 to 8

Suspension: Adjustable with Ratcheting Wheel

i The replacement suspension for the Ridgeline T2 Full Brim is sold separately and includes the sweat band. A standalone replacement sweat band is available (HPRBANDR).

Updated as of 02.26

INSTRUCTIONS

6-Point Strap Removal

1. Remove the suspension from the hard hat.
2. Lay the suspension crown pad down with the ratchet knob towards you.
3. Slide the two diagonal straps closest to you out of the crown pad slits.
4. Remove the horizontal 6-point strap out of the crown pad slits.
5. Lift up the crown pad and slide the horizontal strap away from the suspension.
6. Slide the two diagonal straps closest to you back into the crown pad slits.
7. Install the 4-point suspension back into the hard hat.

Suspension Assembly

1. Insert tab into slot and push down until tab locks in place. Repeat for all tabs.
2. Push down the suspension until it is firmly in place.
3. Turn knob to fit the suspension to proper head size.

i When inserting suspension, front of hat can be determined by markings on the underside of the brim.



LEARN MORE
ABOUT THE RIDGELINE T2'S
KEY FEATURES