

INTRUDER®

UNRESTRICTED VISION, UNRIVALED PROTECTION

Experience ultimate protection and comfort with Intruder® safety glasses. A lightweight, stylish design offers superior impact and debris protection. Integrated nose piece ensures a secure fit. Scratch-resistant lenses for clarity in any environment.




ANTI-FOG
OPTIONS



H2MAX
OPTIONS



CUSTOM
LOGO

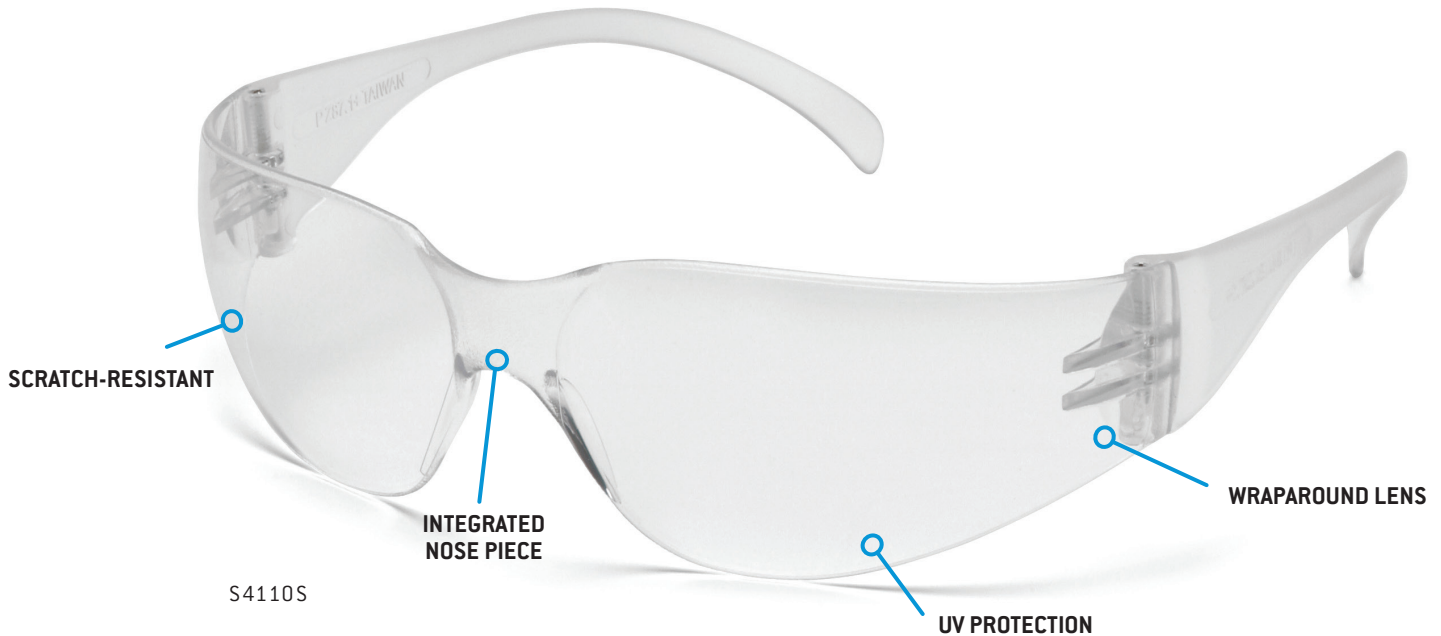

FEATURES

Unparalleled Comfort: Experience the ultimate in comfort with these frameless, lightweight safety glasses, ideal for long hours on the job

Enhanced Field of Vision: Panoramic polycarbonate, wraparound lens offers an extended field of vision crucial for safety in busy work environments, while also providing UV protection for comprehensive eye safety

Confident Fit: Integrated nose piece securely positions the glasses, ensuring they stay in place, providing reliable eye protection

Anti-Fog Clarity: (Select styles) Treated with anti-fog properties to guarantee fog-free clarity, even in extreme conditions

Built Tough: Meets ANSI/ISEA Z87.1-2020,  certified to CAN/CSA Z94.3-20 for eye and face protection devices



SB4110S



SN4110S



SR4110S

INTRUDER®

UNRESTRICTED VISION, UNRIVALED PROTECTION

Experience ultimate protection and comfort with Intruder® safety glasses. A lightweight, stylish design offers superior impact and debris protection. Integrated nose piece ensures a secure fit. Scratch-resistant lenses for clarity in any environment.



ANTI-FOG
OPTIONS



H2MAX
OPTIONS



CUSTOM
LOGO

VARIATIONS

Lens and Temples | 12 Variations

| | |
|------------|-----------------------|
| ● S4110S | Clear |
| ● S4110ST | Clear AF |
| ● S4110STM | Clear H2MAX AF |
| ● S4120S | Gray |
| ● S4120ST | Gray AF |
| ● S4120STM | Gray H2MAX AF |
| ● S4130S | Amber |
| ● S4160S | Infinity Blue |
| ● S4170S | Silver Mirror |
| ● S4175S | Blue Mirror |
| ● S4180S | I/O Mirror |
| ● S4180ST | I/O Mirror AF |

Black Temples | 1 Variation

| | |
|-----------|-------|
| ● SB4110S | Clear |
|-----------|-------|

Blue Temples | 1 Variation

| | |
|-----------|-------|
| ● SN4110S | Clear |
|-----------|-------|

Red Temples | 1 Variation

| | |
|-----------|-------|
| ● SR4110S | Clear |
|-----------|-------|

Lens and Temples | Hang Tag Polybag

| | |
|---------------|-----------------------------------------|
| ● PYS4110S4PK | 4 Pack of Clear Lens with Clear Temples |
|---------------|-----------------------------------------|

Lens and Temples | Dispenser Box

| | |
|-----------|---------------------------------------------|
| ● S4110SD | 12 Pack of Clear Lens with Clear Temples |
| ● S4120SD | 12 Pack of Gray Lens with Gray Temples |
| ● S4180SD | 12 Pack of I/O Mirror Lens with I/O Temples |



S4110SD

MATERIALS

| Lens | Temples | Hinge | Screw |
|---------------|---------------|---------------|-----------------|
| Polycarbonate | Polycarbonate | Polycarbonate | Stainless Steel |

MARKINGS

| Part No. | Lens Marking | Frame Marking | Lens Marking Symbols | Temple Marking Symbols | Measurements |
|----------|-----------------|-------------------------|------------------------------------------------------------------------|----------------------------------------------------------------------------------------|-----------------------------------------|
| S4110S | P Z87 + U6 | P Z87 + / P c SEI Z94.3 | P: Manufacturer's mark | P: Manufacturer's mark | Weight: 23.1 gm |
| S4110ST | P Z87 + U6 | P Z87 + / P c SEI Z94.3 | Z87: ANSI/ISEA Z87.1-2020 standard for eye and face protection devices | Z87: ANSI/ISEA Z87.1-2020 standard for eye and face protection devices | PD: 64 mm |
| S4110STM | P Z87 + U6 X | P Z87 + / P c SEI Z94.3 | +: High impact | +: High impact | Bridge: 17.27 mm |
| S4120S | P Z87 + U6 L3 | P Z87 + / P c SEI Z94.3 | S: Special Purpose | SEI Z94.3: Certified for CAN/CSA Z94.3-20 standard for eye and face protection devices | Lens base: 10 curve |
| S4120ST | P Z87 + U6 L3 | P Z87 + / P c SEI Z94.3 | X: Tested Anti-fog | | Lens size diagonal: 77.08 mm |
| S4120STM | P Z87 + U6 L3 X | P Z87 + / P c SEI Z94.3 | UV Filter Transmittance | | Lens size vertical: 43.38 mm |
| S4130S | P Z87 + U6 S | P Z87 + / P c SEI Z94.3 | U6: .01% max effective far UV • .1% max near UV | | Lens thickness: 2.5 mm |
| S4160S | P Z87 + U6 S | P Z87 + / P c SEI Z94.3 | Visible Light Filters | | Overall length (lens - tip): 156 mm |
| S4170S | P Z87 + U6 S | P Z87 + / P c SEI Z94.3 | L1.7: 55% Max. Visible Light | | Overall width (hinge - hinge): 135.5 mm |
| S4175S | P Z87 + U6 S | P Z87 + | L3: 18% max visible light | | Closest point between lens: 16.67 mm |
| S4180S | P Z87 + U6 L1.7 | P Z87 + / P c SEI Z94.3 | | | |
| S4180ST | P Z87 + U6 S | P Z87 + | | | |
| SB4110S | P Z87 + U6 | P Z87 + / P c SEI Z94.3 | | | |
| SN4110S | P Z87 + U6 | P Z87 + / P c SEI Z94.3 | | | |
| SR4110S | P Z87 + U6 | P Z87 + / P c SEI Z94.3 | | | |

Product markings may vary // Updated as of 10.24