

INTRUDER®

UNRESTRICTED VISION, UNRIVALED PROTECTION

Experience ultimate protection and comfort with Intruder® safety glasses. A lightweight, stylish design offers superior impact and debris protection. Integrated nose piece ensures a secure fit. Scratch-resistant lenses for clarity in any environment.




ANTI-FOG
OPTIONS



H2MAX
OPTIONS



CUSTOM
LOGO

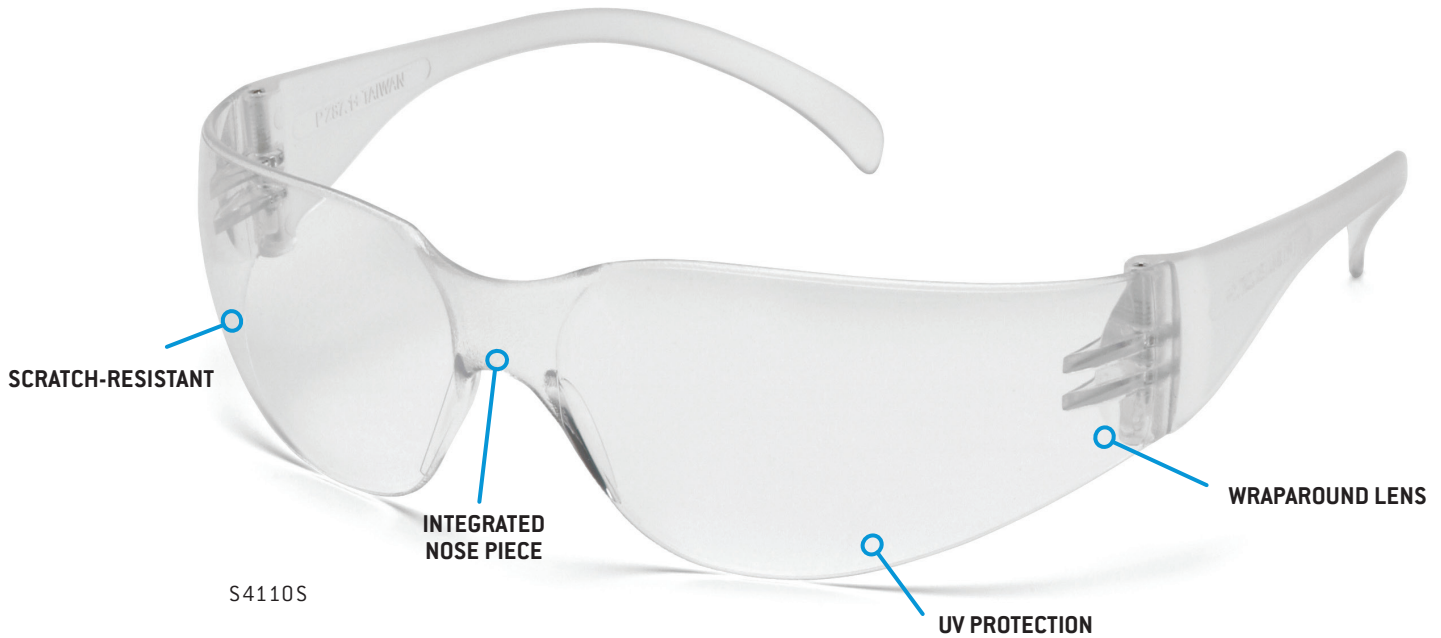


FEATURES

Unparalleled Comfort: Experience the ultimate in comfort with these frameless, lightweight safety glasses, ideal for long hours on the job

Enhanced Field of Vision: Panoramic polycarbonate, wraparound lens offers an extended field of vision crucial for safety in busy work environments, while also providing UV protection for comprehensive eye safety

Confident Fit: Integrated nose piece securely positions the glasses, ensuring they stay in place, providing reliable eye protection

Anti-Fog Clarity: (Select styles) Treated with anti-fog properties to guarantee fog-free clarity, even in extreme conditions

Built Tough: (Select styles) Meets ANSI/ISEA Z87.1-2020 +,  certified for CAN/CSA Z94.3-20 high impact standards and CE & UKCA certified to EN 166 for eye and face protection devices



SB4110S



SN4110S



SR4110S

INTRUDER®

UNRESTRICTED VISION, UNRIVALED PROTECTION

Experience ultimate protection and comfort with Intruder® safety glasses. A lightweight, stylish design offers superior impact and debris protection. Integrated nose piece ensures a secure fit. Scratch-resistant lenses for clarity in any environment.



ANTI-FOG
OPTIONS



H2MAX
OPTIONS



CUSTOM
LOGO

VARIATIONS

Lens and Temples | 12 Variations

S4110S	Clear
S4110ST	Clear AF
S4110STM	Clear H2MAX AF
S4120S	Gray
S4120ST	Gray AF
S4120STM	Gray H2MAX AF
S4130S	Amber
S4160S	Infinity Blue
S4170S	Silver Mirror
S4175S	Blue Mirror
S4180S	I/O Mirror
S4180ST	I/O Mirror AF

Black Temples | 1 Variation

SB4110S	Clear
---------	-------

Blue Temples | 1 Variation

SN4110S	Clear
---------	-------

Red Temples | 1 Variation

SR4110S	Clear
---------	-------

Lens and Temples | Hang Tag Polybag

PYS4110S4PK	4 Pack of Clear Lens with Clear Temples
-------------	---

Lens and Temples | Dispenser Box

S4110SD	12 Pack of Clear Lens with Clear Temples
S4120SD	12 Pack of Gray Lens with Gray Temples
S4180SD	12 Pack of I/O Mirror Lens with I/O Temples



S4110SD

MATERIALS

Lens	Temples	Hinge	Screw
Polycarbonate	Polycarbonate	Polycarbonate	Stainless Steel

MARKINGS

Part No.	Lens Marking	Frame Marking	Lens Marking Symbols	Temple Marking Symbols	Measurements
S4110S	P Z87 + U6	P Z87 + / P c SEI Z94.3	P: Manufacturer's mark	P: Manufacturer's mark	Weight: 23.1 gm
S4110ST	P Z87 + U6	P Z87 + / P c SEI Z94.3	Z87: ANSI/ISEA Z87.1-2020 standard for eye and face protection devices	Z87: ANSI/ISEA Z87.1-2020 standard for eye and face protection devices	PD: 64 mm
S4110STM	P Z87 + U6 X	P Z87 + / P c SEI Z94.3	+: High impact	+: High impact	Bridge: 17.27 mm
S4120S	P Z87 + U6 L3	P Z87 + / P c SEI Z94.3	S: Special Purpose	SEI Z94.3: Certified for CAN/CSA Z94.3-20 standard for eye and face protection devices	Lens base: 10 curve
S4120ST	P Z87 + U6 L3	P Z87 + / P c SEI Z94.3	X: Tested Anti-fog		Lens size diagonal: 77.08 mm
S4120STM	P Z87 + U6 L3 X	P Z87 + / P c SEI Z94.3			Lens size vertical: 43.38 mm
S4130S	P Z87 + U6 S	P Z87 + / P c SEI Z94.3	UV Filter Transmittance		Lens thickness: 2.5 mm
S4160S	P Z87 + U6 S	P Z87 + / P c SEI Z94.3	U6: .01% max effective far UV • .1% max near UV		Overall length (lens - tip): 156 mm
S4170S	P Z87 + U6 S	P Z87 + / P c SEI Z94.3	Visible Light Filters		Overall width (hinge - hinge): 135.5 mm
S4175S	P Z87 + U6 S	P Z87 +	L1.7: 55% Max. Visible Light		Closest point between lens: 16.67 mm
S4180S	P Z87 + U6 L1.7	P Z87 + / P c SEI Z94.3	L3: 18% max visible light		
S4180ST	P Z87 + U6 S	P Z87 +			
SB4110S	P Z87 + U6	P Z87 + / P c SEI Z94.3			
SN4110S	P Z87 + U6	P Z87 + / P c SEI Z94.3			
SR4110S	P Z87 + U6	P Z87 + / P c SEI Z94.3			

Product markings may vary // Updated as of 10.25

PYRAMEX®

P 800.736.8673 // F 901.861.4967 // W PYRAMEX.COM